



# Handspring Visor Edge Back Panel Replacement

This guide will show you how to remove the back cover.

Written By: Nick Lazarakis



## INTRODUCTION

The only tool needed is a #00 Phillips Screw driver.


---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Back Panel

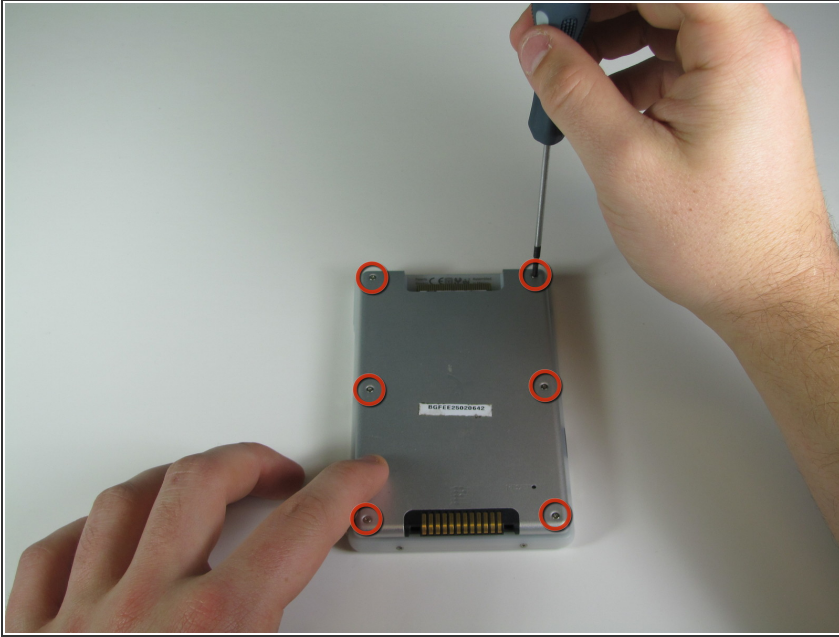

- Remove the six 4.1 mm Phillips screws from the back plate using the #00 Phillips Screwdriver.

## Step 2



- Remove the black plate from the PDA.

### Step 3




- Remove four 2.6 mm Philips screws that are on the sides of the frame.
- Remove the remaining 3.9 mm Philips screw holding together the stylus holster and the frame.

### Step 4




- Remove the four 2.6 mm Philips screws on the top and bottom of the frame.

## Step 5

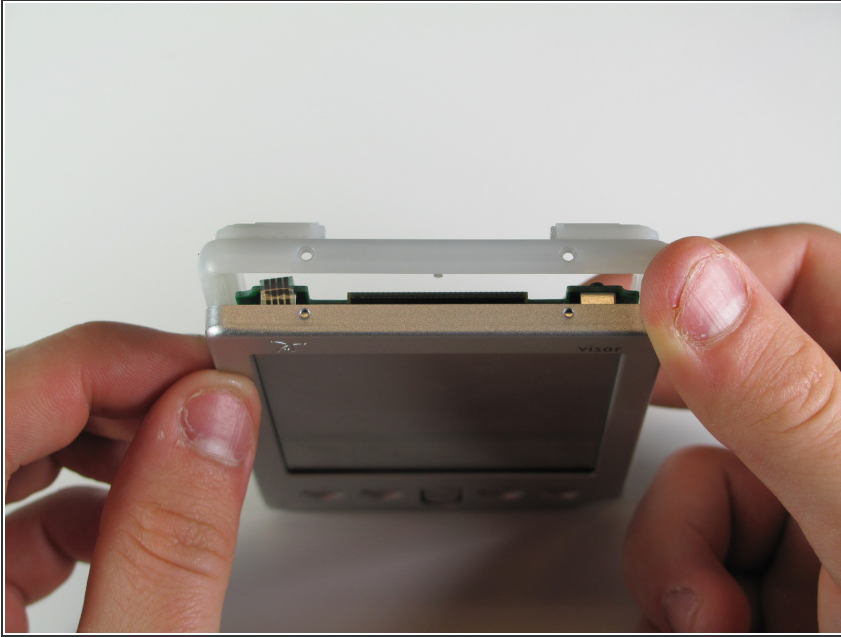

- Remove the white frame from the PDA.

 The frame may get stuck on the corners so be very gentle when working the corners off.

---

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 10:44:25 AM.